

Rubber gasket rings

Diameter: $\varnothing 80 - \varnothing 300$ mm.

Standard rubber gasket rings are made of EPDM 80 rubber and used for f.b. assemblies to improve degree of tightness.


One rubber gasket ring is fitted for each assembly. Rubber gasket rings are fitted on either f.b. edge before assembly of ducting.

Rubber gasket rings are U-shaped in cross section. Hardness: 80 shore. Operating temperature range: -40°C to $+100^{\circ}\text{C}$.

Same dimensions of rubber gasket rings are available in NITRIL rubber.

Hardness: 80 shore. Operating temperature range: -15°C to $+80^{\circ}\text{C}$. NITRIL rubber is resistant to oil and petrol, and to some degree to acids and bases.

Supplied in plastic bags of 10 pcs.

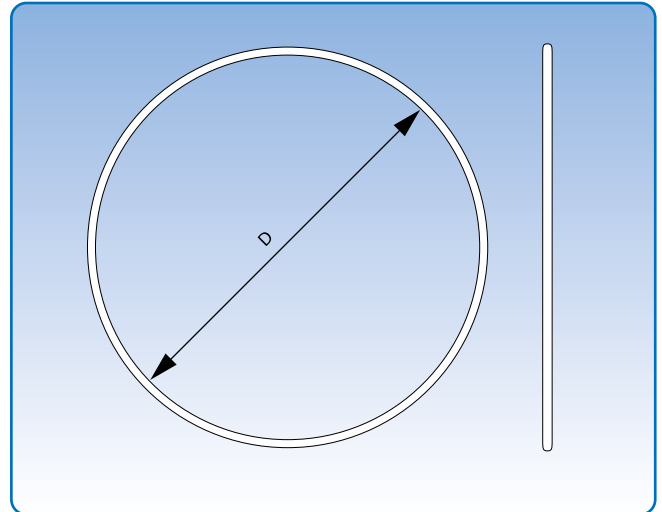

Dimensional specifications are given in the table below.

Item no.	Dimensions	
	D mm	Weight/10 pcs. kg
820170080	80	0,20
820170100	100	0,30
820170120	120	0,50
820170125	125	0,50
820170140	140	0,60
820170150	150	0,60
820170160	160	0,70
820170180	180	0,70
820170200	200	0,80
820170225	225	1,10
820170250	250	1,12
820170275	275	1,12
820170300	300	1,30